



L-Frames

Modular Lighting Frames, a versatile solution for suspended lighting. Special couplers enable 90° couplings. Standard Eurotruss CS1 Connectors are used to connect L-Frames, Clamps and Extensions. T-Joints, with or without down, facilitate single or double suspended lighting setups.

Unleash your creativity with the possibilities these products offer!





L-Frame System explained

With the new Modular Lighting Frames Eurotruss offers a multi-flexible and complete modular solution for suspended lights. The new system enables a theoretically infinite configuration of ladder systems for various lights.

The L-Frame system uses our HD tube which is 50x3 mm. The special coupler with pin positions in two ways makes it possible to make 90° connections. To connect the L-Frames, Clamps and Extensions you use standard Eurotruss CS1 Connectors

The L-Frames which are 800mm wide and available in 415 and 1000mm high, is the fundament of this system. Next to the L-Frames there is a T-Joint with and without connection down available to make drop arms for single or double suspended lighting situations.

Some examples of what you can do with the L-frame products are shown below. Let creativity be your guide!



Three large L-frames and one small L-Frame on the top are shown above, choose your accessories for connecting and hanging.



Three small L-frames underneath each other are shown here, choose your accessories for connecting and hanging.




Three T-joints with a connection down are connected in a ladder configuration, perfect to hold small moving heads, LED fixtures or parcans.



Use a standard T-joint or T-joint with a connection down and an extension tube to make drop arms.

TIP: use a T-joint at the top and a double coupler for extra stability.

L-Frame & Modular Lighting Frames

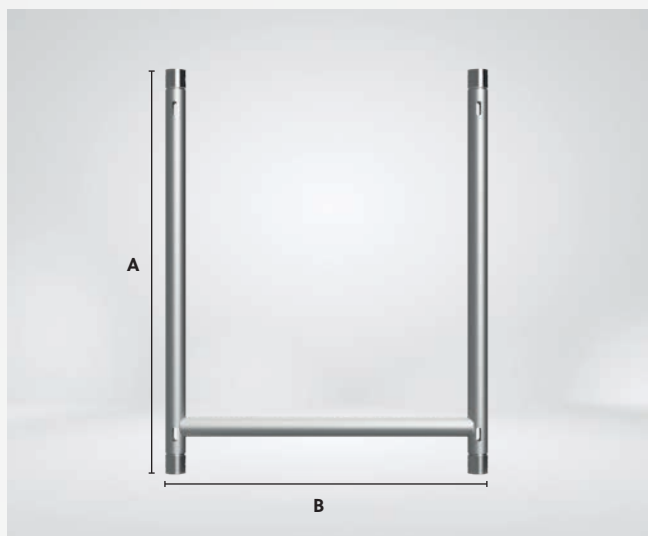


L-Frame Large

Measurements	A	B	Weight
Metric	1000 mm	800 mm	3,8 kg



L-Frame Small

Measurements	A	B	Weight
Metric	415 mm.	800 mm	2,4 kg

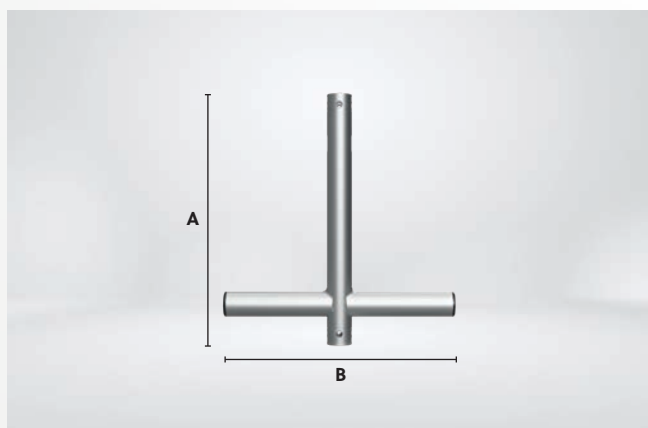

Drop Arm T-Joint with connection down

Measurements	A	B	Weight
Metric	500 mm.	460 mm	1,4 kg



Drop Arm T-Joint

Measurements	A	B	Weight
Metric	250 mm	460 mm	0,9 kg

**All L-Frames & Modular Lighting Frames are delivered excl. connection material*

L-Frame Extension Tubes & Accessories

To create height or longer frame space between L-Frame Ladders, you can work with Extensions.



Extension Tube L-Frame 250/2000mm

productcode: L-EXT-025/2000(B)

L-FRAME MODULAR LIGHTING FRAMES ACCESSORIES



Productcode	Description
RT-C5001-SCON	30mm wide clamp with 1/2 connector WLL=100 kg
RT-C5001B-SCON	30mm wide clamp with 1/2 connector WLL=100 kg (BLACK)
RT-C5010-SCON	50mm wide clamp with 1/2 connector WLL=500 kg (ALU)
RT-C5010B-SCON	50mm wide clamp with 1/2 connector WLL=500 kg (BLACK)



Productcode	Description
RT-C5008-SCON	Trigger clamp with 1/2 connector WLL=250 kg (Alu) (50mm wide)
RT-C5008B-SCON	Trigger clamp with 1/2 connector WLL=250 kg (Black) (50mm wide)



Productcode	Description
RT-C5005-SCON	Quick trigger clamp with 1/2 connector WLL=250 kg (Alu) (50mm wide)
RT-C5005B-SCON	Quick trigger clamp with 1/2 connector WLL=250 kg (Black) (50mm wide)



Productcode	Description
CS1-SCON-STE	1/2 Conical Connector M12 hole, Steel with positioning pin and Eye-Bolt SWL 100 kg



Productcode	Description
RT-HF-SQL	Safety 4mm X 650mm with Quick Link (100 kg) Alu
RT-HF-SQLB	Safety 4mm X 650mm with Quick Link (100 kg) Black
RT-HF-SH	Safety 4mm X 650mm with Moving Head Hook (36 kg) Alu
RT-HF-SHB	Safety 4mm X 650mm with Moving Head Hook (36KG) Black